


## VENT COLUMNS

### SPECIFICATION

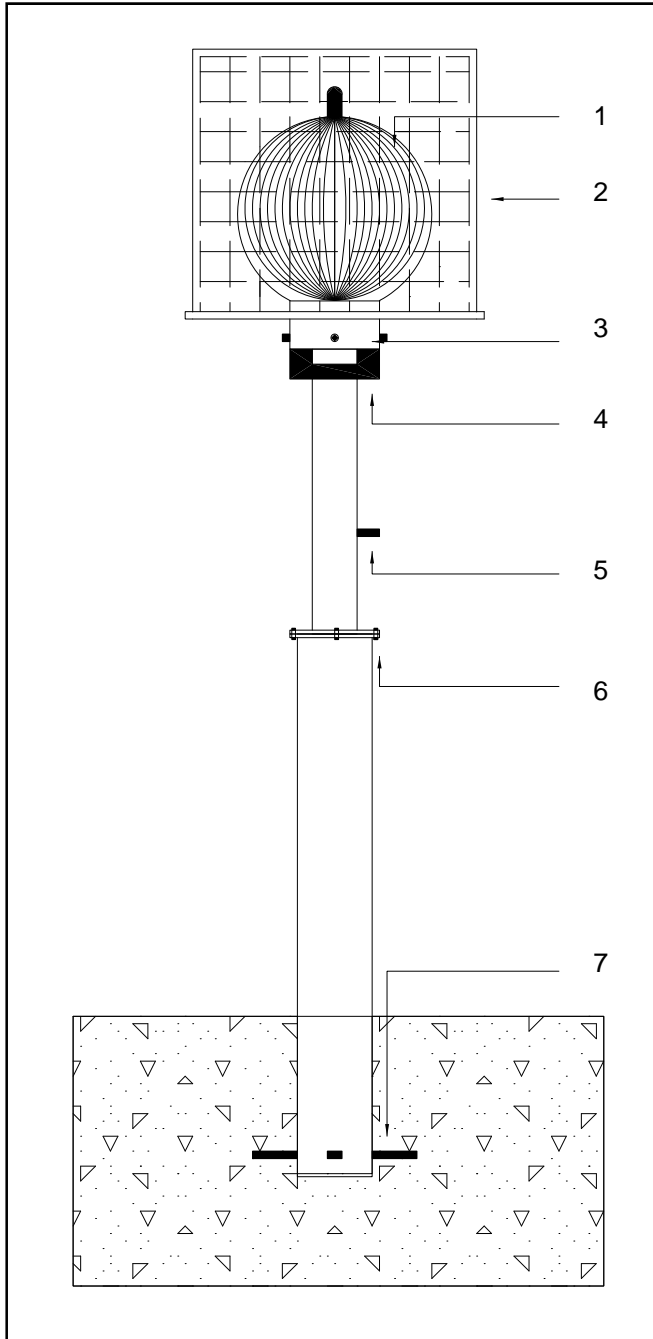

1. **Aspiromatic cowl**  
Stainless UGINOX alloy  
ASP 160 - fits pipes 75-150 mm  
Average flow - 115m<sup>3</sup>/hr  
ASP 240 - fits pipe 150- 225 mm  
Average flow - 230m<sup>3</sup>/hr
2. **Protective bird cage**  
Mild steel mesh  
3 mm weld mesh x 25mm squares  
Height - 360 mm Diameter - 415 mm  
Finish - galvanised or paint
3. **Fasteners**  
Allows the cowl to be hinged back for inspection or cleaning.
4. **Adaptor flange**  
3 mm steel plate  
Bolted to steel vent stack  
Finish - galvanised or paint
5. **Sampling point**  
¾" BSP socket & plug or Tefen NW6
6. **Transition flange (optional)**  
Hinged or bolted flange
7. **High Strength embedment lugs**  
6" diameter - 3  
8" diameter - 4

### STANDARD ITEMS

Part number	Description
AC36	ASP 160 cowl
AC695	ASP 240 cowl
VS001	6" x 3.5m galvanised stack
VS002	6" x 3.5m painted stack
VS003	8" x 3.5m galvanised stack
VS004	8" x 3.5m painted stack

**OTHER SIZES & DIMENSIONS AVAILABLE ON REQUEST**

Specifications may be changed without prior notice

Demco is a division of Marton Geotechnical Services Ltd